

इंटरनेट

मानक

Disclosure to Promote the Right To Information

Whereas the Parliament of India has set out to provide a practical regime of right to information for citizens to secure access to information under the control of public authorities, in order to promote transparency and accountability in the working of every public authority, and whereas the attached publication of the Bureau of Indian Standards is of particular interest to the public, particularly disadvantaged communities and those engaged in the pursuit of education and knowledge, the attached public safety standard is made available to promote the timely dissemination of this information in an accurate manner to the public.

“जानने का अधिकार, जीने का अधिकार”

Mazdoor Kisan Shakti Sangathan

“The Right to Information, The Right to Live”

“पुराने को छोड़ नये के तरफ”

Jawaharlal Nehru

“Step Out From the Old to the New”

IS 1252 (1991): Hot rolled steel bulb angles Dimensions
[CED 7: Structural Engineering and structural sections]



“ज्ञान से एक नये भारत का निर्माण”

Satyanarayan Gangaram Pitroda

“Invent a New India Using Knowledge”



“ज्ञान एक ऐसा खजाना है जो कभी चुराया नहीं जा सकता है”

Bhartrhari—Nitiśatakam

“Knowledge is such a treasure which cannot be stolen”

BLANK PAGE



भारतीय मानक

तप्त वेल्लित इस्पात के बल्ब एंगलों के आयाम

(पहला पुनरीक्षण)

Indian Standard

**HOT ROLLED STEEL BULB ANGLES —
DIMENSIONS**

(First Revision)

UDC 669'14'122 : 669'14-423

© BIS 1991

BUREAU OF INDIAN STANDARDS
MANAK BHAVAN, 9 BAHADUR SHAH ZAFAR MARG
NEW DELHI 110002

FOREWORD

This Indian Standard (First Revision) was adopted by the Bureau of Indian Standards, after the draft finalized by the Structural Sections Sectional Committee had been approved by the Civil Engineering Division Council.

Bulb angles are generally used in ship building and car-building industries. In the preparation of this standard the Sectional Committee specially kept in view the requirements of these industries.

This standard was first published in 1958. In this revision apart from general updating, the designation of bulb angles has been modified.

For the purpose of deciding whether a particular requirement of this standard is complied with, the final value, observed or calculated, expressing the results of a test or analysis, shall be rounded off in accordance with IS 2 : 1960 'Rules for rounding off numerical values (*revised*)'. The number of significant places retained in the rounded off value should be the same as that of the specified value in this standard.

Indian Standard

HOT ROLLED STEEL BULB ANGLES — DIMENSIONS

(First Revision)

1 SCOPE

1.1 This standard lays down the nominal dimensions, mass and sectional properties of hot rolled steel bulb angles.

2 REFERENCE

2.1 The Indian Standard IS 1852 : 1985 'Specification for rolling and cutting tolerances for hot-rolled steel products (fourth revision)' is a necessary adjunct to this standard.

3 TERMINOLOGY

3.0 For the purpose of this standard, the following definitions shall apply.

3.1 Y-Y Axis — A line passing through the centre of gravity of the profile of the sections and parallel to the axis of the web.

3.2 X-X Axis — A line passing through the centre of the gravity of the profile of the section and at right angles to the Y-Y axis.

3.3 U-U and V-V Axis — Lines passing through the centre of gravity of the profile of the section, representing the principal axes of the section.

4 SYMBOLS

4.1 Letter symbols used in this standard have been indicated in the Figure in Table 1. More explicit definitions for certain symbols used in the table and figure are given below:

a = Sectional area in sq cm

m = Nominal mass in kg per m = 0.785 a

D = Projection of the bulb from the inside face of the web

C_{xx} = Distance of centre of gravity of the section from the back line of the flange

C_{yy} = Distance of centre of gravity of the section from the back line of the web

I_{xx} = Moment of inertia about the X-X axis

I_{yy} = Moment of inertia about the Y-Y axis

I_{uu} = Moment of inertia (Max) about the U-U axis

I_{vv} = Moment of inertia (Min) about the V-V axis

e_{xx} = Distance of extreme fibre from the X-X axis

e_{yy} = Distance of extreme fibre from the Y-Y axis

$Z_{xx} = \frac{I_{xx}}{c_{xx}}$ = Modulus of section about the X-X axis

$Z_{yy} = \frac{I_{yy}}{c_{yy}}$ = Modulus of section about the Y-Y axis

$r_{xx} = \sqrt{\frac{I_{xx}}{a}}$ = Radius of gyration about the X-X axis

$r_{yy} = \sqrt{\frac{I_{yy}}{a}}$ = Radius of gyration about the Y-Y axis

$r_{uu} = \sqrt{\frac{I_{uu}}{a}}$ = Radius of gyration about the U-U axis

$r_{vv} = \sqrt{\frac{I_{vv}}{a}}$ = Radius of gyration about the V-V axis

α = Angle between the U-U and the X-X axis

5 DESIGNATION

5.1 Hot rolled steel bulb angles conforming to this standard shall be designated by letters BA followed by a figure denoting the depth of longer side of the angle in mm. * and ** to denote heavier sections.


6 DIMENSIONS AND SECTIONAL PROPERTIES

6.1 The nominal dimension and mass of bulb

angles sections shall be as given in Table 1. Sectional properties of the bulb angles have been given in Table 1 for information.

6.2 The rolling and cutting tolerances of the bulb angles shall be as stipulated, in IS 1852 : 1985.

Table 1 Nominal Dimensions, Mass and Sectional Properties of Bulb Angles
(Clauses 4.1 and 6.1)

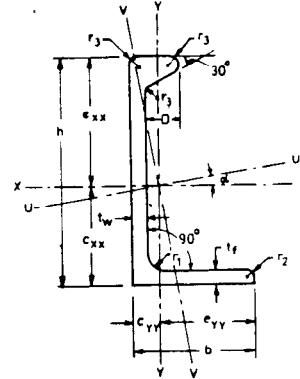

Designation	Mass per Metre (m)	Sectional Area (a)	Size (h) × (b)	Thick- ness of Web (t _w)	Thick- ness of Flange (t _f)	(D)	Radi- us at Root (r ₁)	Radi- us at Toe (r ₂)	Radi- us at Bulb Corners (r ₃)	Centre of Gravity		Distance of Extreme Fibres		Tan α	Moments of Inertia				Radii of Gyration				Moduli of Section		Designation
										C _{xx}	C _{yy}	t _{xx}	t _{yy}		I _{xx}	I _{yy}	I _{xx} (Max)	I _{yy} (Min)	r _{xx}	r _{yy}	r _{uu} (Max)	r _{vv} (Min)	Z _{xx}	Z _{yy}	
(1)	(2) kg	(3) cm ²	(4) mm × mm	(5) mm	(6) mm	(7) mm	(8) mm	(9) mm	(10) mm	(11) cm	(12) cm	(13) cm	(14) cm	(15)	(16) cm ⁴	(17) cm ⁴	(18) cm ⁴	(19) cm ⁴	(20) cm	(21) cm	(22) cm	(23) cm	(24) cm ³	(25) cm ³	(26)
BA 100	8.6	10.94	100 × 65	6.0	6.0	13	10.0	5.0	4.0	3.92	1.43	6.08	5.07	0.291	143	33.0	153	22.8	3.61	1.74	3.74	1.44	23.5	6.5	BA 100
BA 100*	9.6	12.17	100 × 65	7.0	6.5	13	10.0	5.0	4.0	3.95	1.43	6.05	5.07	0.288	155	35.7	165	24.9	3.56	1.71	3.69	1.43	25.6	7.0	BA 100*
BA 125	12.2	15.60	125 × 75	7.0	7.0	16	11.0	5.5	5.0	5.06	1.60	7.44	5.90	0.248	322	60.4	339	43.3	4.54	1.97	4.66	1.67	43.2	10.2	BA 125
BA 125*	13.4	17.11	125 × 75	8.0	7.5	16	11.0	5.5	5.0	5.08	1.61	7.42	5.89	0.246	344	64.6	362	46.6	4.49	1.94	4.60	1.65	46.4	11.0	BA 125*
BA 150	16.1	20.45	150 × 75	8.0	8.0	20	11.0	5.5	6.0	6.52	1.55	8.48	5.95	0.167	613	71.4	628	55.9	5.47	1.87	5.54	1.65	72.2	12.0	BA 150
BA 150*	18.8	23.94	150 × 75	10.0	9.0	20	11.0	5.5	6.0	6.53	1.57	8.47	5.93	0.162	686	79.8	703	63.4	5.36	1.83	5.42	1.63	81.1	13.5	BA 150*
BA 175	20.0	25.54	175 × 90	8.0	9.0	23	13.5	6.5	7.0	7.44	1.89	10.06	7.11	0.185	1 070	137	1 110	104	6.48	2.32	6.38	2.02	107	19.3	BA 175
BA 175*	23.3	29.66	175 × 90	10.0	10.0	23	13.5	6.5	7.0	7.46	1.90	10.04	7.10	0.181	1 190	152	1 230	117	6.34	2.27	6.43	1.99	119	21.4	BA 175*
BA 175**	26.5	33.74	175 × 90	12.0	11.0	23	13.5	6.5	7.0	7.49	1.92	10.01	7.08	0.177	1 310	166	1 350	130	6.23	2.22	6.32	1.96	131	23.5	BA 175**
BA 200	28.2	35.95	200 × 90	11.0	11.0	26	13.5	6.5	8.0	8.87	1.86	11.13	7.14	0.136	1 880	172	1 910	140	7.23	2.19	7.29	1.97	169	24.1	BA 200
BA 200*	33.6	42.76	200 × 90	14.0	12.5	26	13.5	6.5	8.0	8.89	1.91	11.11	7.09	0.131	2 130	194	2 160	160	7.06	2.13	7.12	1.93	192	27.3	BA 200*
BA 225	31.4	39.94	225 × 90	11.0	11.0	29	13.5	6.5	9.0	10.4	1.80	12.10	7.20	0.103	2 660	179	2 690	152	8.17	2.12	8.21	1.95	220	24.9	BA 225
BA 225*	37.3	47.50	225 × 90	14.0	12.5	29	13.5	6.5	9.0	10.4	1.85	12.13	7.15	0.098	3 020	202	3 040	175	7.97	2.06	8.01	1.92	249	28.2	BA 225*
BA 250	34.9	44.41	250 × 90	11.0	11.0	33	13.5	6.5	10.0	12.1	1.78	12.93	7.22	0.075	3 680	188	3 700	168	9.11	2.06	9.13	1.95	285	26.0	BA 250
BA 250*	39.2	49.96	250 × 90	13.0	12.0	33	13.5	6.5	10.0	12.1	1.81	13.01	7.19	0.072	4 010	205	4 030	185	8.96	2.02	8.98	1.92	308	28.5	BA 250*
BA 275	40.9	52.13	275 × 90	12.0	12.0	36	13.5	6.5	11.0	13.5	1.80	13.96	7.21	0.057	5 160	213	5 180	197	9.95	2.02	9.97	1.94	370	29.6	BA 275
BA 275*	45.6	58.15	275 × 90	14.0	13.0	36	13.5	6.5	11.0	13.4	1.83	14.05	7.17	0.054	5 580	231	5 600	215	9.80	1.99	9.81	1.92	397	32.2	BA 275*
BA 300	47.5	60.47	300 × 90	13.0	13.0	39	13.5	6.5	12.0	15.0	1.82	15.02	7.18	0.042	7 030	241	7 050	229	10.8	2.00	10.8	1.95	468	33.6	BA 300
BA 300*	52.6	66.96	300 × 90	15.0	14.0	39	13.5	6.5	12.0	14.9	1.86	15.08	7.14	0.040	7 570	260	7 580	248	10.6	1.97	10.6	1.92	502	36.4	BA 300*

NOTE — Sections carrying with * and ** in the designation are heavier sections in each size obtained from the same set of rolls as the lighter sections by spreading of the rolls. The width of flanges of these sections gets increased by an amount equal to the difference between the thickness of the webs. Therefore while ordering these heavier sections, mass should be mentioned.

Standard Mark

The use of the Standard Mark is governed by the provisions of the *Bureau of Indian Standards Act, 1986* and the Rules and Regulations made thereunder. The Standard Mark on products covered by an Indian Standard conveys the assurance that they have been produced to comply with the requirements of that standard under a well defined system of inspection, testing and quality control which is devised and supervised by BIS and operated by the producer. Standard marked products are also continuously checked by BIS for conformity to that standard as a further safeguard. Details of conditions under which a licence for the use of the Standard Mark may be granted to manufacturers or producers may be obtained from the Bureau of Indian Standards.

Bureau of Indian Standards

BIS is a statutory institution established under the *Bureau of Indian Standards Act, 1986* to promote harmonious development of the activities of standardization, marking and quality certification of goods and attending to connected matters in the country.

Copyright

BIS has the copyright of all its publications. No part of these publications may be reproduced in any form without the prior permission in writing of BIS. This does not preclude the free use, in the course of implementing the standard, of necessary details, such as symbols and sizes, type or grade designations. Enquiries relating to copyright be addressed to the Director Publications), BIS.

Revision of Indian Standards

Indian Standards are reviewed periodically and revised, when necessary and amendments, if any, are issued from time to time. Users of Indian Standards should ascertain that they are in possession of the latest amendments or edition. Comments on this Indian Standard may be sent to BIS giving the following reference:

Doc : No. CED 8 (4873)

Amendments Issued Since Publication

Amend No.	Date of Issue	Text Affected

BUREAU OF INDIAN STANDARDS

Headquarters :

Manak Bhavan, 9 Bahadur Shah Zafar Marg, New Delhi 110002
Telephones : 331 01 31, 331 13 75

Telegrams : Manaksanstha
(Common to all Offices)

Regional Offices :

Telephone

Central : Manak Bhavan, 9 Bahadur Shah Zafar Marg
NEW DELHI 110002

{ 311 01 31
{ 331 13 75

Eastern : 1/14 C. I. T. Scheme VII M, V. I. P. Road, Maniktola
CALCUTTA 700054

37 86 62

Northern : SCO 445-446, Sector 35-C, CHANDIGARH 160036

53 38 43

Southern : C. I. T. Campus, IV Cross Road, MADRAS 600113

235 02 16

Western : Manakalaya, E9 MIDC, Marol, Andheri (East)
BOMBAY 400093

6 32 92 95

Branches : AHMADABAD, BANGALORE, BHOPAL, BHUBANESHWAR, COIMBATORE,
FARIDABAD, GHAZIABAD, GUWAHATI, HYDERABAD, JAIPUR, KANPUR,
PATNA, THIRUVANANTHAPURAM.